


# Ultra low frequency seismic accelerometer 731-207



## Key features

- Compact construction to fit in tight spaces
- Ultra-high sensitivity
- Ultra low-noise electronics for clear signals at very low vibration levels
- Reverse wiring protection

## Certifications

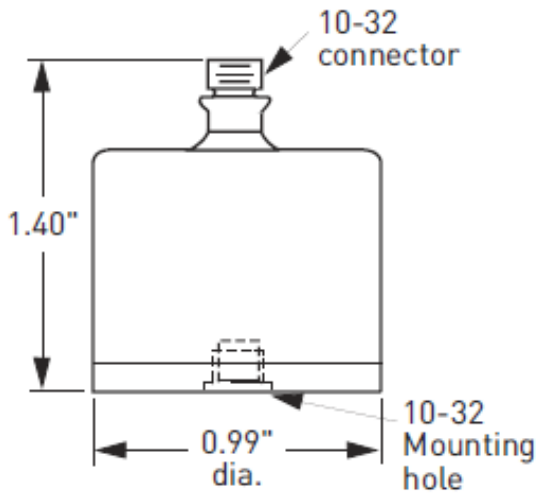

Note: Due to continuous process improvement, specifications are subject to change without notice.  
This document is cleared for public release.

Wilcoxon Sensing Technologies  
20511 Seneca Meadows Parkway  
Germantown, MD 20876  
info@wilcoxon.com

Tel: (301) 330 8811  
Fax: (301) 330 8873  
www.wilcoxon.com

**Wilcoxon Sensing Technologies**  
An Amphenol Company

# Ultra low frequency seismic accelerometer 731-207

## SPECIFICATIONS

<b>Sensitivity, <math>\pm 10\%</math>, 25° C</b>	10 V/g
<b>Acceleration range</b>	0.5 g peak
<b>Amplitude nonlinearity</b>	1%
<b>Frequency response, nominal:</b>	
$\pm 5\%$	0.6 - 650 Hz
$\pm 10\%$	0.5 - 850 Hz
$\pm 3$ dB	0.2 - 1,300 Hz
<b>Resonance frequency, mounted, nominal</b>	2.4 kHz
<b>Transverse sensitivity, max</b>	1% of axial
<b>Temperature response:</b>	
0° C	-14%
+70° C	+14%
<b>Power requirement:</b>	
Voltage source	18 - 30 VDC
Current regulating diode	2 - 10 mA
<b>Electrical noise, equiv. g, nominal:</b>	
Broadband 2.5 Hz to 25 kHz	2 $\mu$ g
Spectral 2 Hz	0.28 $\mu$ g/ $\sqrt{\text{Hz}}$
10 Hz	0.09 $\mu$ g/ $\sqrt{\text{Hz}}$
100 Hz	0.03 $\mu$ g/ $\sqrt{\text{Hz}}$
<b>Output impedance, max</b>	500 $\Omega$
<b>Bias output voltage, nominal</b>	10 VDC
<b>Grounding</b>	case grounded
<b>Temperature range</b>	0 to 70° C
<b>Vibration limit</b>	50 g peak
<b>Shock limit</b>	250 g peak
<b>Electromagnetic sensitivity at 60 Hz</b>	20 $\mu$ g/gauss
<b>Sealing</b>	hermetic
<b>Base strain sensitivity</b>	0.0005 g/ $\mu$ strain
<b>Weight</b>	50 grams
<b>Case material</b>	316L stainless steel
<b>Mounting</b>	10-32 UNF
<b>Output connector</b>	10-32 coaxial
<b>Recommended cabling</b>	J93

## Contact

Wilcoxon Sensing Technologies

20511 Seneca Meadows Parkway  
Germantown, MD 20876, USA

Tel: +1 301 330 8811  
Fax: +1 301 330 8873

info@wilcoxon.com

www.wilcoxon.com

## Accessories supplied:

- Calibration data
- SF1 mounting stud

## Accessories available: R1-

2-J93-10 cable assembly, magnetic mounting bases, SF5 cementing studs, SF4 isolation mounting base, signal conditioners

Note: Due to continuous process improvement, specifications are subject to change without notice.  
This document is cleared for public release.

Wilcoxon Sensing Technologies  
20511 Seneca Meadows Parkway  
Germantown, MD 20876  
info@wilcoxon.com

Tel: (301) 330 8811  
Fax: (301) 330 8873  
www.wilcoxon.com

Wilcoxon Sensing Technologies  
An Amphenol Company