

Overview

- Guided microwave for continuous level and interface measurement of liquids
- TDR technology
- Works in applications with steam, buildup, foam generation or condensation
- Wide range of applications
- Maintenance free
- Compact unit
- Standard version
- High temperature and high pressure version
- Rod, rope or coax version
- Cutable probes
- High chemical resistance of the probe
- Second line of defense (optional)
- Electronic 2-wire 4 - 20 mA, HART
- Integrated Display and Adjustment Module
- Extensive Diagnostics
- Multiple approvals available
- 2011/65/EU RoHS conform

Approvals	CE		
	ATEX / IEC-Ex / INMETRO	Zone 0 and 0/1	Intrinsically Safe
		Zone 1 and 0/1	Flameproof
		Zone 20 and 20/21	Dust Ignition Proof
	FM	General purp.	
		Cl. I, II, III Div. 1	Intrinsically Safe
		Cl. I Div. 1	Explosionproof
		Cl. I, II, III Div. 2	Non incensive
		Cl. II, III Div. 1	Dust Ignition Proof
	TR-CU	Ordinary Locations	
		Zone 0 and 0/1	Intrinsically Safe
		Zone 1 and 0/1	Flameproof
		Zone 20 and 20/21	Dust Ignition Proof
Functional safety	IEC 61508	SIL2 single-channel / SIL3 multi-channel	

Electronics	Operating voltage	9.6 ... 35 V DC, 2-wire loop Limited voltage range for Ex ia and with Display and Adjustment Module
	Measuring signal	Current loop 4 - 20 mA according to NAMUR NE 43, HART
	Display and Adjustment Module	<ul style="list-style-type: none"> • LCD-display with background light • Display of actual measurement • Display of setup parameters (e.g. min. and max adjustment, material properties, damping, linearisation, false signal suppression) • After programming the display can be removed. The setted parameters can be copied to other units. • Display of diagnostics data (e.g. temperature, echo curve, trailing pointer) simulation of level) • Operation via push buttons

Housing	Material, version	Aluminium, single- or double chamber (powder coated) Stainless steel, single chamber (electro polished)
	Ingress protection	Type 6P/ IP66/ IP68 (0.2 bar)
	Ambient temperature	-40 ... +80 °C (-40 ... +176 °F)


Blocking distance	Upper/ lower blocking distance	No measurement is possible within this area. Observe increased deviation of measurement value next to the blocking distance (details see Operating instructions).																	
		<table border="1" style="display: inline-table; margin-right: 20px;"> <thead> <tr> <th>(in mm)</th> <th>Rope /Rod</th> <th>Coaxl</th> </tr> </thead> <tbody> <tr> <td>Water</td> <td>80</td> <td>30</td> </tr> <tr> <td>Oil</td> <td>150</td> <td>100</td> </tr> </tbody> </table> <table border="1" style="display: inline-table;"> <thead> <tr> <th>(in mm)</th> <th>Rope /Rod</th> <th>Coaxl</th> </tr> </thead> <tbody> <tr> <td>Water</td> <td>0</td> <td>0</td> </tr> <tr> <td>Oil</td> <td>50-200</td> <td>50</td> </tr> </tbody> </table>	(in mm)	Rope /Rod	Coaxl	Water	80	30	Oil	150	100	(in mm)	Rope /Rod	Coaxl	Water	0	0	Oil	50-200
(in mm)	Rope /Rod	Coaxl																	
Water	80	30																	
Oil	150	100																	
(in mm)	Rope /Rod	Coaxl																	
Water	0	0																	
Oil	50-200	50																	

NG 8100 Standard version


Length of extension "L"	Rod Rope Coax	300 .. 6,000 mm (11.81 .. 236") 500 .. 75,000 mm (19.7 .. 2,953") 300 .. 6,000 mm (11.81 .. 236")
Diameter	Rod Rope Coax	ø8 mm (ø0.31") ø12 mm (ø0.47") ø2 mm (ø0.08") ø4 mm (ø0.16") ø21.3 mm (ø0.84") ø42.2 mm (ø1.67")
Material	Rod Rope Gravity weight Coax	1.4404 (SS316L) 1.4401 (SS316) 1.4404 (SS316L) 1.4404 (SS316L)/ PFA
		Lead-through of probe to process side (rod/ rope/ coax lead-through): Isolation material: PEEK or PPS Sealing: FKM, FFKM, EPDM or silicone FEP coated
		Process connection: Thread 1.4404 (SS316L) with sealing Klingsil C-4400 Flange 1.4435 (SS316L), welded
		Second line of defense* (optional): Borosilicate glass GPC 540 / 316L
Process temperature (thread- or flange temperatur)		Depending on lead-through lead-through of probe to process side (rod/ rope/ coax lead-through): Sealing FKM, EPDM or silicone FEP coated: -40 ... +150°C (-40 ... +302°F) with isolation material PEEK -40 ... +80°C (-40 ... +176°F) with isolation material PPS Sealing FFKM: -20 ... +150°C (-4 ... +302°F) with isolation material PEEK -20 ... +200°C (-4 ... +392°F) with isolation material PEEK and temperature adapter
Process pressure		Depending on lead-through lead-through of probe to process side (rod/ rope/ coax lead-through): -1 .. 40 bar (-14.5 ... +580 psi g) with isolation material PEEK -1 .. 6 bar (-14.5 ... +87 psi g) with isolation material PPS For flanges the max. pressure rating of the flange must be additionally observed.
Lateral load/ tensile load		Max. lateral load (torque): Rod ø8 mm 10 Nm (7.38 lbf ft) Rod ø12 mm 30 Nm (22.13 lbf ft) Coax ø21.3 mm 60 Nm (44 lbf ft) Coax ø42.2 mm 300 Nm (221 lbf ft) Max. tensile load: Rope ø2 mm 1.5 KN (337 lbf) Rope ø4 mm 2.5 KN (562 lbf)
Dielectric constant of the medium	Rope / Rod Coax	DK ≥1.6 DK ≥1.4

* The Second Line of Defense is a second level of the process separation in the form of a gas-tight feedthrough in the lower part of the housing, preventing product from penetrating into the housing.

NG 8100 Standard version

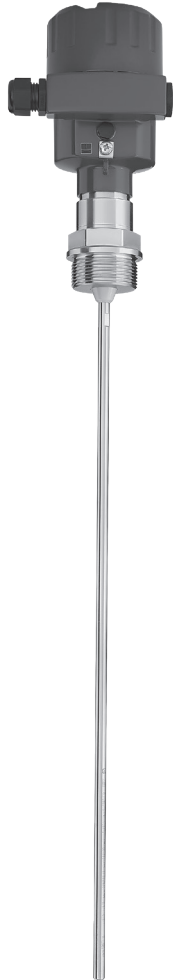

Rod version
 (pos.8 E, pos.5+6 3D)

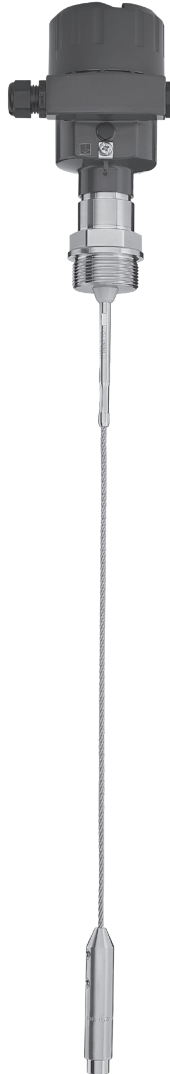

Rope version
 (pos.8 A, pos.5+6 3D)



Coax version
 (pos.8 L, pos.5+6 3D)

Cable entries (by default)

Depending on model selected, the following cable entries are supported (details and options see pos.13):

Version:	Cable entry:
CE, ATEX, IEC-Ex, INMETRO, TR-CU	M20 x 1.5 1x screwed cable gland, 1x blind plug
FM	NPT ½" tapered ANSI B1.20.1 1x open conduit + 1x blind plu



Display and Adjustment Module
 (pos. 9)

Housing

Standard housing is aluminium single chamber.
 Alternative housings see option pos.16.

NG 8200 High temperatur- and high pressure version

Length of extension "L"	Rod Rope Coax	300 .. 6,000 mm (11.81 .. 236") 500 .. 60,000 mm (19.7 .. 2,362") 300 .. 6,000 mm (11.81 .. 236")
Diameter	Rod Rope Coax	ø8 mm (ø0.31") ø16 mm (ø0.63") ø2 mm (ø0.08") ø4 mm (ø0.16") ø21.3 mm (ø0.84") ø42.2 mm (ø1.67")
Material	Rod Rope Gravity weight Coax	1.4404 (SS316L) 1.4401 (SS316) 1.4404 (SS316L) 1.4404 (SS316L)
		Lead-through of probe to process side (rod/ rope/ coax lead-through): Version: Isolation material: Sealing: 250°C PEEK FFKM 280°C/450°C Ceramic Graphite
		Process connection: Thread 1.4404 (SS316L) For 250°C version with sealing Klingersil C-4400 Flange 1.4435 (SS316L), welded
		Second line of defense* (optional): Borosilikate glas GPC 540 / 316L
Process temperature (thread- or flange temperatur)	Selectable	-20 ... +250°C (-4 ... +482°F) -196 ... +280°C (-321 ... +536°F) -196 ... +450°C (-321 ... +842°F)
Process pressure	250°C version 280°C/450°C version	-1 .. 100 bar (-14.5 +1.450 psi g) -1 .. 400 bar (-14.5 +5.800 psi g)
		For flanges the max. pressure rating of the flange must be additionally observed. Derating of max. pressure with temperature must be observed (details see operating instructions).
Lateral load/ tensile load	Max. lateral load (torque): Rod ø8 mm Rod ø16 mm Coax ø21.3 mm Coax ø42.2 mm Max. tensile load: Rope ø2 mm Rope ø4 mm	4 Nm (3 lbf ft) 30 Nm (22.13 lbf ft) 60 Nm (44 lbf ft) 300 Nm (221 lbf ft) 1.5 KN (337 lbf) 2.5 KN (562 lbf)
Dielectric constant of the medium	Rope / Rod Coax	DK ≥1.6 DK ≥1.4

* The Second Line of Defense is a second level of the process separation in the form of a gas-tight feedthrough in the lower part of the housing, preventing product from penetrating into the housing.

NG 8200 High temperatur- and high pressure version



Rod version 450°C
 (pos.3 2, Pos.8 E, Pos.5+6 3D)



Rope version 250°C
 (pos. 3.3, Pos.8 A, Pos.5+6 3D)



Coax version 280°C
 (pos. 3.1, Pos.8 P, Pos.5+6 3D)

Cable entries (by default)

Depending on model selected, the following cable entries are supported (details and options see pos.13):

Version:	Cable entry:
CE, ATEX, IEC-Ex, INMETRO, TR-CU	M20 x 1.5 1x screwed cable gland, 1x blind plug
FM	NPT ½" tapered ANSI B1.20.1 1x open conduit + 1x blind plu




Display and Adjustment Module
 (pos. 9)

Housing


Standard housing is aluminium single chamber.
 Alternative housings see option pos.16.

Dimensions

NG 8100 / NG 8200 Housing

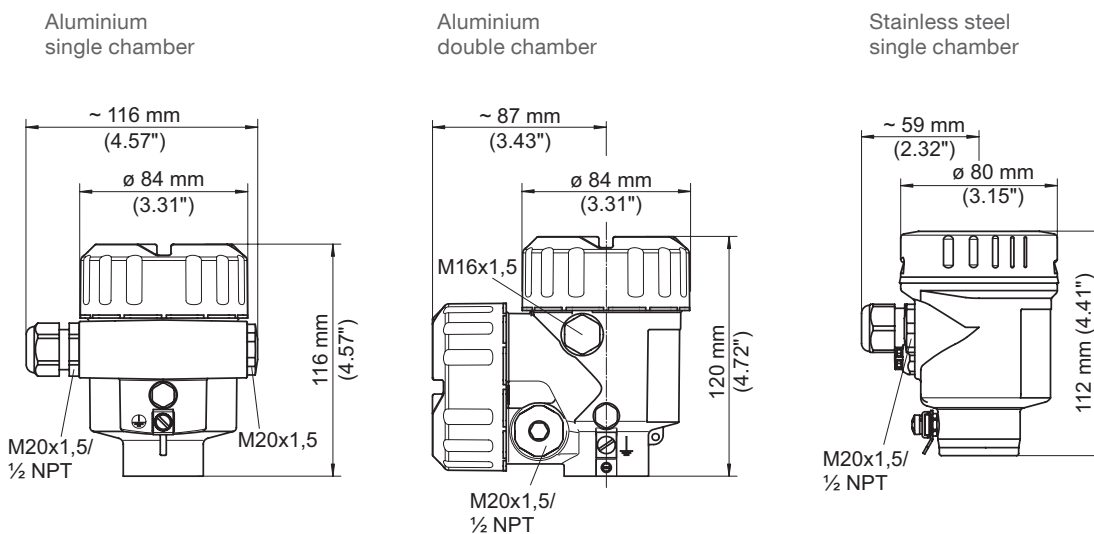


NG 8100 Rod version

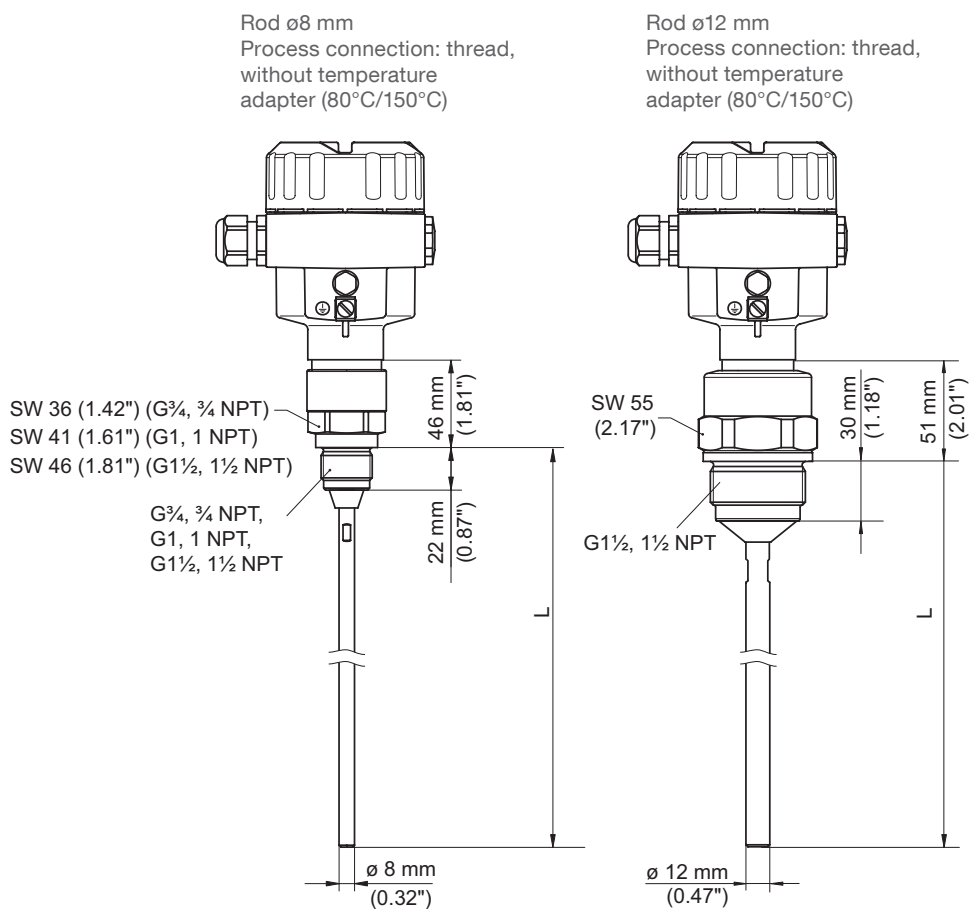

Dimensions

NG 8100 Rope version


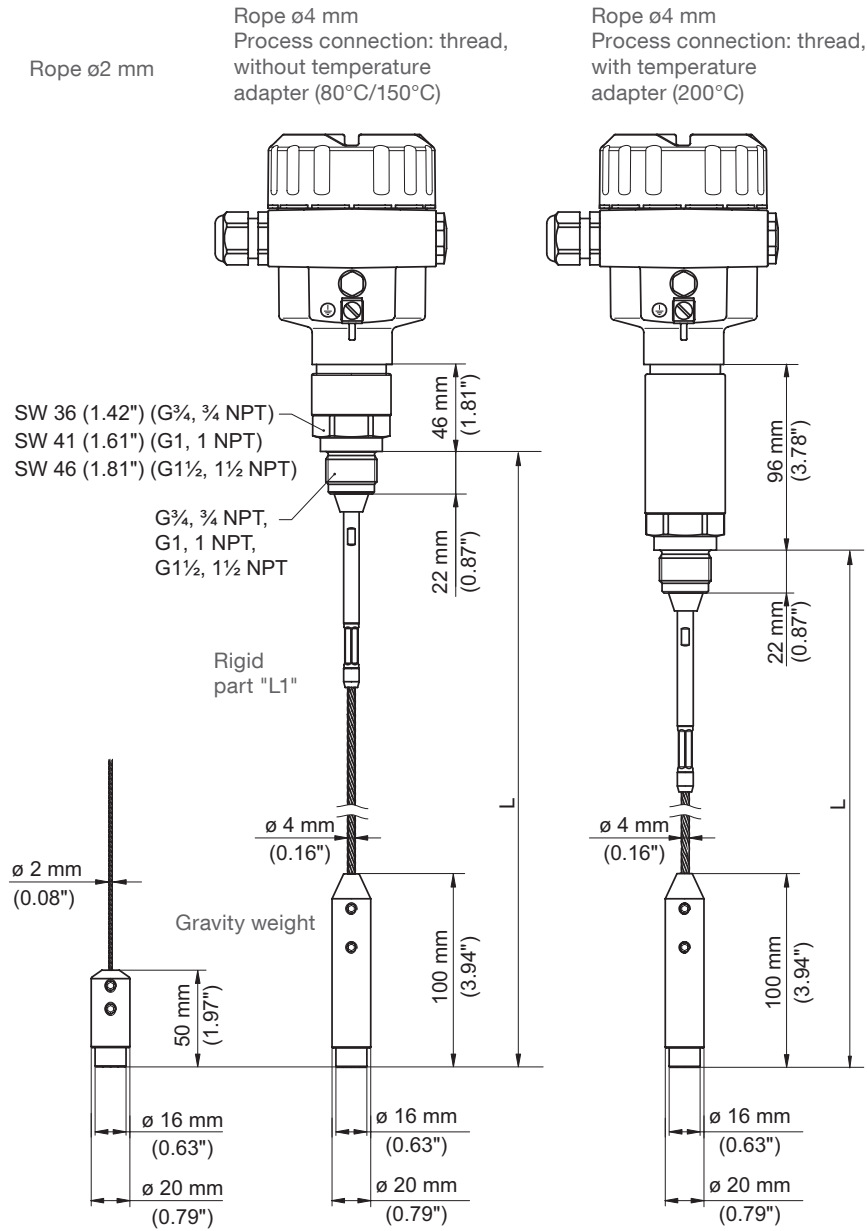


Dimensions

NG 8100 Coax version

Coax $\varnothing 21.3$ mm
 Process connection: thread,
 without temperature
 adapter (80°C/150°C)

Coax $\varnothing 42.2$ mm
 Process connection: thread,
 without temperature
 adapter (80°C/150°C)

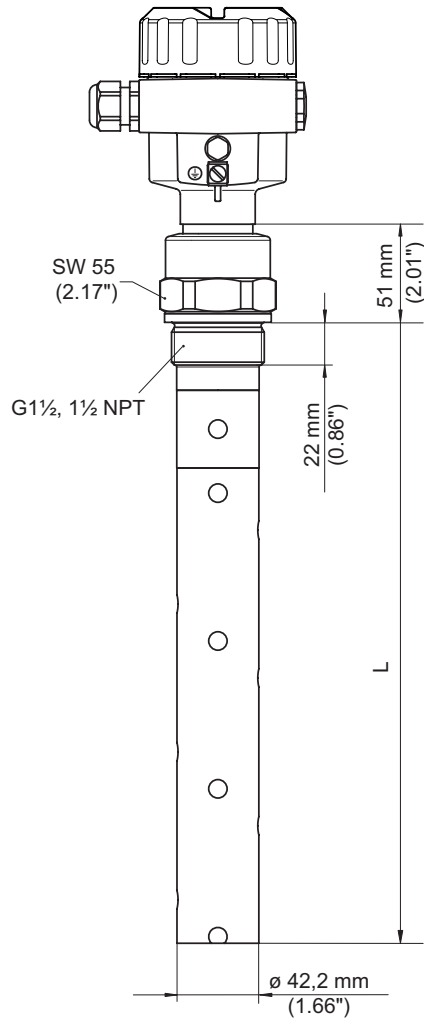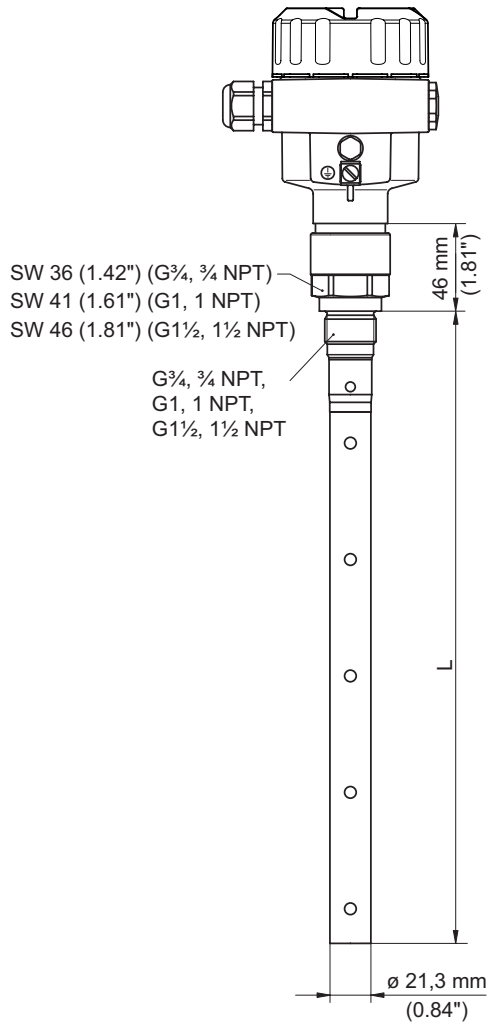


Dimensions

NG 8200 Rod version

Process temp. 250°C
Rod ø8 mm
Process connection: thread

Process temp. 280°C
Rod ø16 mm
Process connection: thread

Process temp. 450°C
Rod ø16 mm
Process connection: thread

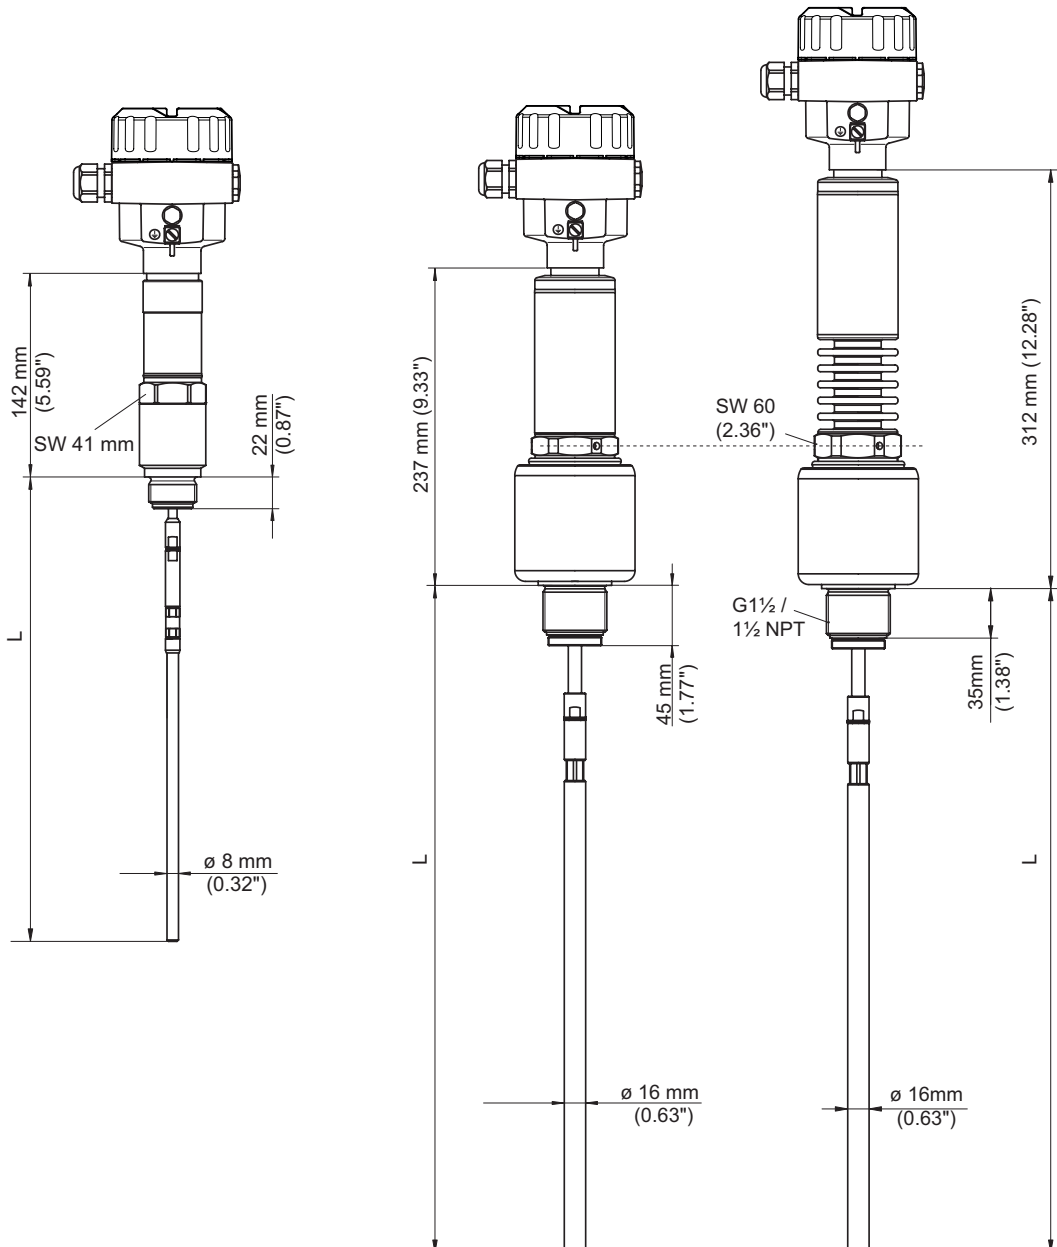





Dimensions

NG 8200 Rope version

Process temp. 250°C
 Rope ø4 mm
 Process connection: thread

Process temp. 280°C
 Rope ø4 mm
 Process connection: thread

Process temp. 450°C
 Rope ø4 mm
 Process connection: thread

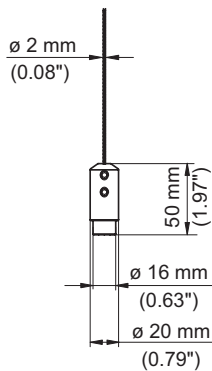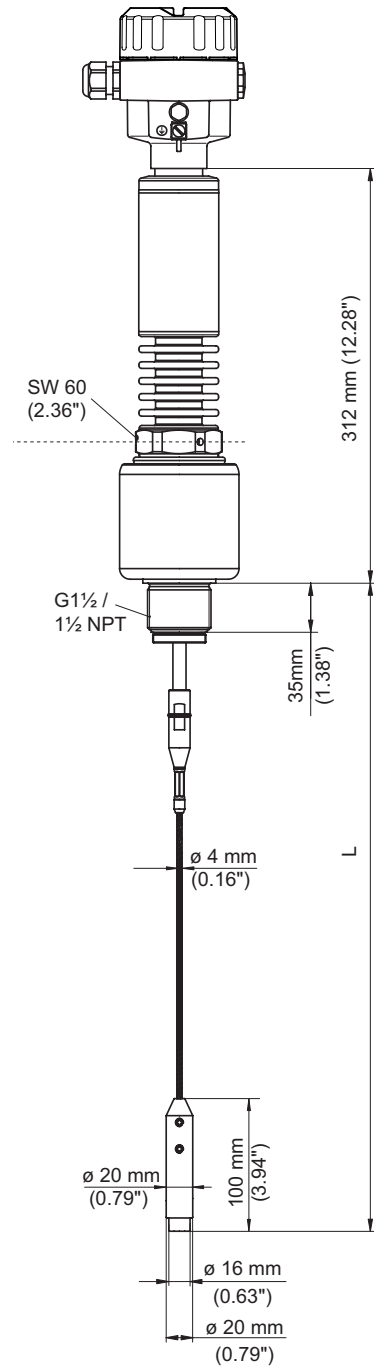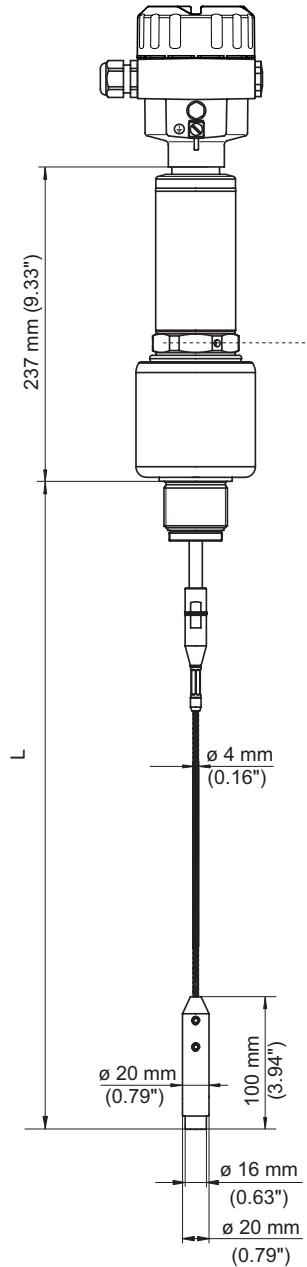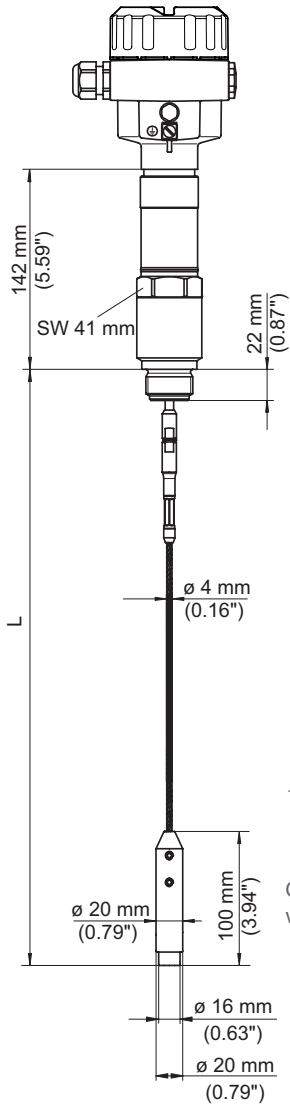


Rope ø2 mm


Dimensions

NG 8200 Coax version


Process temp. 250°C
Coax $\varnothing 21.3$ mm
Process connection: thread

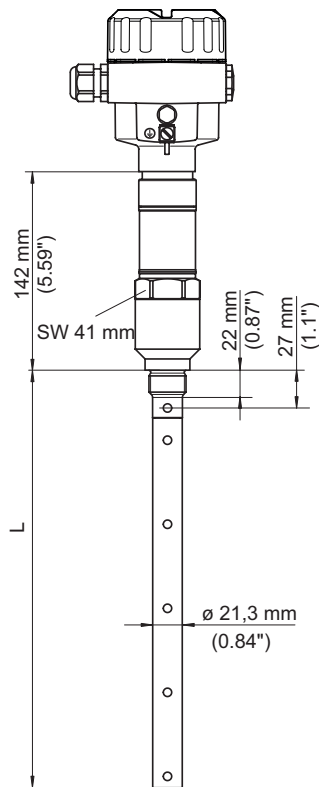

Process temp. 280°C
Coax $\varnothing 42.2$ mm
Process connection: thread

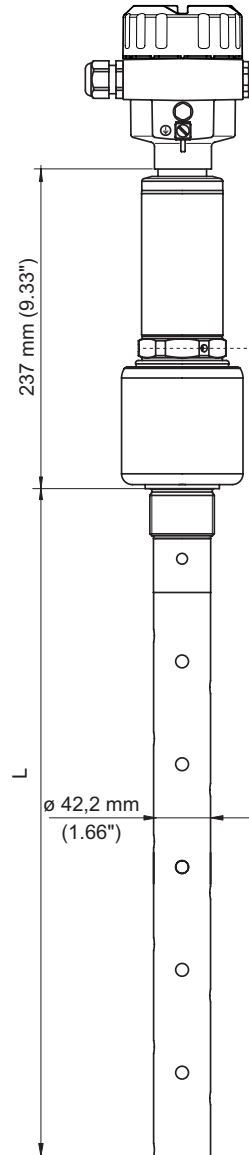


Process temp. 450°C
Coax $\varnothing 42.2$ mm
Process connection: thread

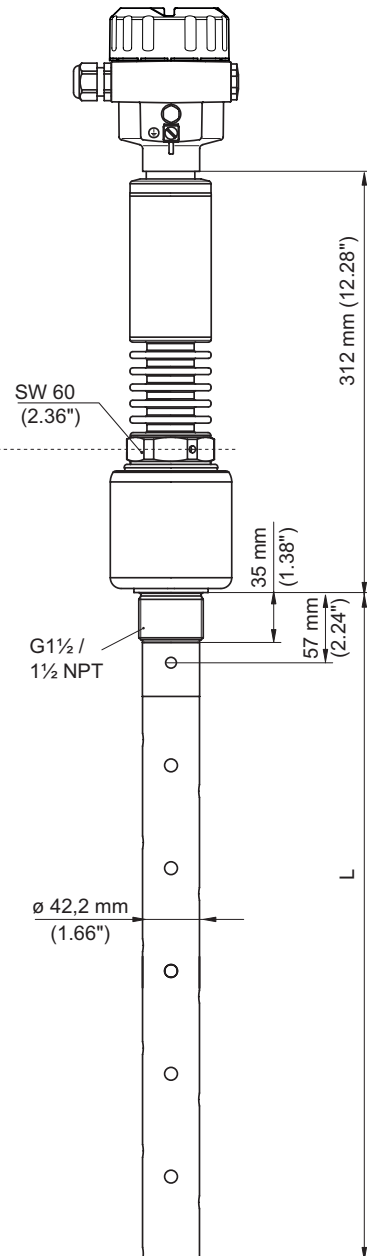


Dimensions

Flanges

	Code	Type	Number of holes	d2 mm (inch)	Lk mm (inch)	D mm (inch)	T thickness mm (inch)
ASME B16.5, raised face	5A	1" 150 lbs	4	15.9 (0.63)	79.3 (3.12)	108.0 (4.25)	14.3 (0.56)
	5B	1" 300 lbs	4	19.1 (0.75)	88.9 (3.5)	124.0 (4.88)	17.5 (0.69)
	5C	1" 600 lbs	4	19.1 (0.75)	88.9 (3.5)	124.0 (4.88)	17.5 (0.69)
	5D	1½" 150 lbs	4	15.9 (0.63)	98.6 (3.88)	127.0 (5.0)	17.5 (0.69)
	5E	1½" 300 lbs	4	22.2 (0.87)	114.3 (4.5)	155.5 (6.12)	20.6 (0.81)
	5F	1½" 600 lbs	4	22.2 (0.87)	114.3 (4.5)	155.5 (6.12)	22.4 (0.88)
	5G	2" 150 lbs	4	19.1 (0.75)	120.7 (4.75)	152.4 (6.01)	19.1 (0.75)
	5H	2" 300 lbs	8	19.1 (0.75)	127.0 (5.0)	165.1 (6.5)	22.4 (0.88)
	5J	2" 600 lbs	8	19.1 (0.75)	127.0 (5.0)	165.1 (6.5)	25.4 (1.0)
	5R	2" 1500 lbs	8	25.4 (1.0)	165.1 (6.5)	215.9 (8.5)	38.1 (1.5)
	5K	3" 150 lbs	4	19.1 (0.75)	152.4 (6.01)	190.5 (7.5)	23.9 (0.94)
	5L	3" 300 lbs	8	22.2 (0.87)	168.2 (6.62)	209.6 (8.25)	26.9 (1.06)
	5M	3" 600 lbs	8	22.2 (0.87)	168.2 (6.62)	209.6 (8.25)	31.8 (1.25)
	5S	3" 1500 lbs	8	38.1 (1.5)	203.2 (8.0)	266.7 (10.5)	47.8 (1.88)
	5N	4" 150 lbs	8	19.1 (0.75)	190.5 (7.5)	228.6 (9.0)	23.9 (0.94)
	5P	4" 300 lbs	8	22.2 (0.87)	200.2 (7.88)	254.0 (10.0)	30.2 (1.19)
	5Q	4" 600 lbs	8	25.4 (1.0)	215.9 (8.5)	273.1 (10.75)	38.1 (1.5)
5T	4" 1500 lbs	8	35.1 (1.38)	241.3 (9.5)	311.2 (12.25)	53.8 (2.12)	
EN 1092-1 type B1, raised face	6A	DN25 PN16	4	14.0 (0.55)	85.0 (3.35)	115.0 (4.53)	18.0 (0.71)
	6B	DN25 PN40	4	14.0 (0.55)	85.0 (3.35)	115.0 (4.53)	18.0 (0.71)
	6C	DN40 PN16	4	18.0 (0.71)	110.0 (4.33)	150.0 (5.91)	18.0 (0.71)
	6D	DN40 PN40	4	18.0 (0.71)	110.0 (4.33)	150.0 (5.91)	18.0 (0.71)
	6Q	DN40 PN100	4	22.0 (0.87)	125.0 (4.92)	170.0 (6.69)	26.0 (1.02)
	6E	DN50 PN16	4	18.0 (0.71)	125.0 (4.92)	165.0 (6.5)	18.0 (0.71)
	6F	DN50 PN40	4	18.0 (0.71)	125.0 (4.92)	165.0 (6.5)	20.0 (0.79)
	6R	DN50 PN100	4	26.0 (1.02)	145.0 (5.71)	195.0 (7.68)	28.0 (1.10)
	6T	DN65 PN160	8	26.0 (1.02)	170.0 (6.69)	220.0 (8.66)	34.0 (1.34)
	6G	DN80 PN16	8	18.0 (0.71)	160.0 (6.3)	200.0 (7.87)	20.0 (0.79)
	6H	DN80 PN40	8	18.0 (0.71)	160.0 (6.3)	200.0 (7.87)	24.0 (0.94)
	6U	DN80 PN100	8	26.0 (1.02)	180.0 (7.09)	230.0 (9.06)	32.0 (1.26)
	6J	DN100 PN16	8	18.0 (0.71)	180.0 (7.09)	220.0 (8.66)	20.0 (0.79)
	6K	DN100 PN40	8	22.0 (0.87)	190.0 (7.48)	235.0 (9.25)	24.0 (0.94)
	6L	DN150 PN16	8	22.0 (0.87)	240.0 (9.45)	285.0 (11.2)	22.0 (0.87)
	6M	DN150 PN40	8	26.0 (1.02)	250.0 (9.84)	300.0 (11.8)	28.0 (1.10)
	6N	DN200 PN10	8	22.0 (0.87)	295.0 (11.6)	340.0 (13.4)	24.0 (0.94)
6V	DN200 PN16	12	22.0 (0.87)	295.0 (11.6)	340.0 (13.4)	24.0 (0.94)	
6P	DN200 PN40	12	30.0 (1.18)	320.0 (12.6)	375.0 (14.8)	36.0 (1.42)	



Raised face



Type	Facing thickness
DN25 - DN200 ASME 150 lbs ASME 300 lbs	2 mm (0.08")
ASME 600 lbs ASME 1500 lbs	7 mm (0.28")


Detailed Ex-markings

pos.2	Certificate		Protection method
Q	ATEX II 1G ATEX II 1/2G	Ex ia IIC T6..T1 Ga Ex ia IIC T6..T1 Ga/Gb	Intrinsically Safe
Y	ATEX II 1G ATEX II 1/2G	Ex ia IIC T6..T1 Ga Ex ia IIC T6..T1 Ga/Gb	Intrinsically Safe
	ATEX II 1D ATEX II 1/2D	Ex ta IIIC T! Da Ex ta/tb IIIC T! Da/Db	Dust Ignition Proof
V	ATEX II 1/2G ATEX II 2G	Ex db IIC T6...T1 Ga/Gb Ex db IIC T6...T1 Gb	Flameproof
W	ATEX II 1D ATEX II 1/2D	Ex ta IIIC T! Da Ex ta/tb IIIC T! Da/Db	Dust Ignition Proof
B	IEC Ex	Ex ia IIC T6..T1 Ga Ex ia IIC T6..T1 Ga/Gb	Intrinsically Safe
D	IEC Ex	Ex ia IIC T6..T1 Ga Ex ia IIC T6..T1 Ga/Gb	Intrinsically Safe
		Ex ta IIIC T! Da Ex ta/tb IIIC T! Da/Db	Dust Ignition Proof
C	IEC Ex	Ex db IIC T6...T1 Ga/Gb Ex db IIC T6...T1 Gb	Flameproof
A	IEC Ex	Ex ta IIIC T! Da Ex ta/tb IIIC T! Da/Db	Dust Ignition Proof
F	INMETRO	Ex ia IIC T6...T1 Ga Ex ia IIC T6...T1 Ga/Gb	Intrinsically Safe
G	INMETRO	Ex ia IIC T6...T1 Ga Ex ia IIC T6...T1 Gb/Gb	Intrinsically Safe
		Ex ta IIIC T! Da Ex ta/tb IIIC T! Da/Db	Dust Ignition Proof
K	INMETRO	Ex db IIC T6...T1 Ga/Gb Ex db IIC T6...T1 Gb	Flameproof
L	INMETRO	Ex ta IIIC T! Da Ex ta/tb IIIC T! Da/Db	Dust Ignition Proof
H	FM	NI Class I,II,III Div.2, Gr. A,B,C,D,F,G	Non incendive
P	FM	IS Class I, II, III Div.1, Gr. A-G	Intrinsically Safe
U	FM	XP Class I Div.1, Gr. A-D	Explosionproof
N	FM	DIP Class II,III Div.1, Gr. E,F,G	Dust Ignition Proof
X	TR-CU	0Ex ia IIC T6...T1 Ga X Ga/Gb Ex ia IIC T6...T1 X	Intrinsically Safe
J	TR-CU	0Ex ia IIC T6...T1 Ga X Ga/Gb Ex ia IIC T6...T1 X	Intrinsically Safe
		Ex ta IIIC T... Da X Ex ta/tb IIIC T... Da/Db X	Dust Ignition Proof
R	TR-CU	Ga/Gb Ex db IIC T6...T1 X 1Ex db IIC T6...T1 Gb X	Flameproof
1	TR-CU	Ex ta IIIC T... Da X Ex ta/tb IIIC T... Da/Db X	Dust Ignition Proof

Electrical Installation

4-20 mA

The terminals are located below the Display and Adjustment Module. To connect the unit, remove the display by gently turning the display counter-clockwise until it is free.



Wire cross-section (spring-loaded terminals) :
 Massive wire, stranded wire 0,2 ... 2,5 mm² (AWG 24 ... 14)
 Stranded wire with end sleeve 0,2 ... 1,5 mm² (AWG 24 ... 16)
 Connect cable shield to ground terminal.

Operating voltage (voltage present at terminals):

Version	Display and Adjustment Module (illuminated)	Operating voltage
Non-Ex, Ex d	without	9,6 ... 35 V DC
	with	16 ... 35 V DC
Ex ia	without	9,6 ... 30 V DC
	with	16 ... 30 V DC

4-20 mA HART

Typical PLC/ mA configuration with HART:

- Depending on the system design, the power supply may be separate from the PLC, or integral to it.
- HART resistance (total loop resistance, that is, cable resistance plus 250 Ohm (external resistor) must be limited to a certain value, to ensure a proper function.
 Max. loop resistance = (supply voltage - min. voltage present at terminals) / 22mA
 Example: CE-unit with 24 V DC supply: Max. loop resistance = (24 V - 9,6 V) / 22 mA = 655 Ω
- The external resistor is not required, if the PLC has an integral 250 Ohm resistor.

